
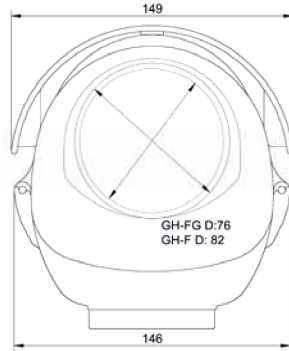
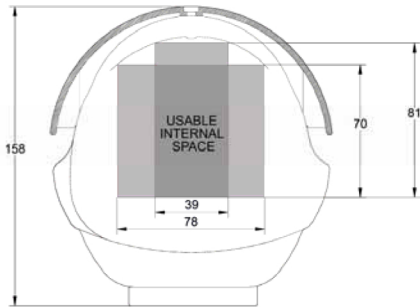


# GH24 Housing Dimensions

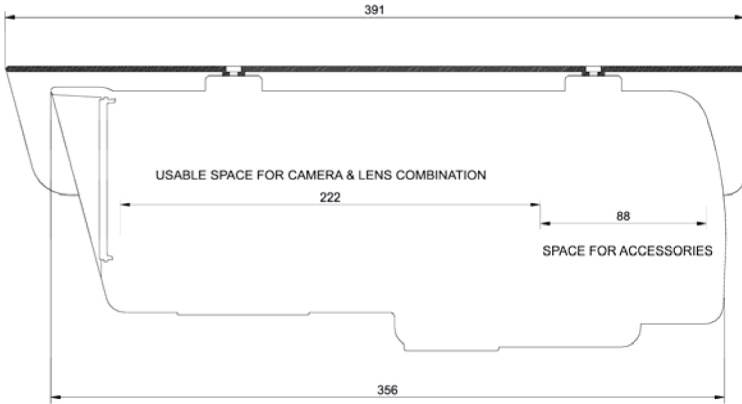

**Weight:**

Housing: <1,04kg  
 Bracket/Adj. Head: <0,42kg  
 Sunshield: <0,34kg

**Consumption:**

GH-F230: < 40 mA  
 GH-F24: < 350 mA  
 GH-F12: < 700 mA

**Maximum internal load:**

IPrate: 20W (-20°C ~+50°C)  
 Operating Temperature: IP 66 (hidden or external cabling)  
 Storage Temperature: -20°C to +55°C (17W max. internal load)  
 Vandal resistance: -30°C to +55°C, RH 85% not condensing  
 Fire-self extinguish: IK10 according to EN50102  
 V2 fire-self extinguish according to UL94