

GANZ ZC-D6000 Series

HI-RES COLOR AND STANDARD B/W DOMES



**9-22mm Telephoto
Varifocal Now Available**

FEATURES

- Hi-Res Color or Standard B/W models
- Hi-res color 3-9mm f1.2 and 9-22mm f1.8 auto iris, standard B/W 4-9mm f1.6 auto iris
- Proprietary pan/tilt/rotation mechanism for mounting on any horizontal or vertical surface
- Optical quality distortion-free dome cover with black inner liner
- 12VDC/24VAC dual voltage power input
- BNC and power connectors included

INDOOR MOUNTING ACCESSORIES



Flush Mount
(Model) ZC-FM2



Wall Mount
(Model ZC6-WM1)



Pendant Mount
(Model ZC6-PM2)




CAMERAS

MODELS

ZC-D6039NHA	Hi-Res Color 3-9mm
ZC-D6922NHA	Hi-Res Color 9-22mm
ZC-D6049EA	Standard-Res B/W 4-9mm
ZC6-PM2	Pendant Mount Ring
ZC-FM2	Flush Mount Kit
ZC6-WM1	Wall Mount Bracket

ZC-D6000 Series

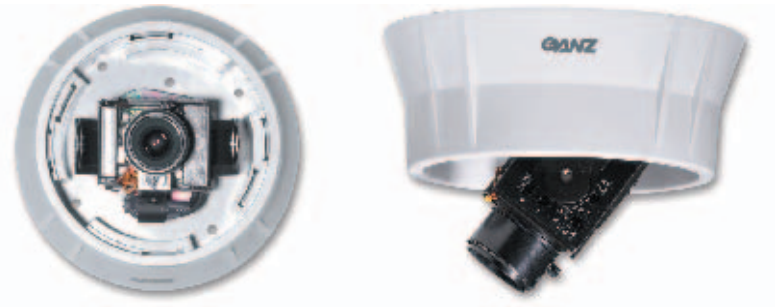

SPECIFICATIONS

MODELS	ZC-D6922NHA	ZC-D6039NHA	ZC-D6049EA
FOCAL LENGTH	9-22mm	3.0 - 9.0 mm	4.0 - 9.0 mm
MAX. APERTURE RATIO	F1.8	F1.2	F1.6
IRIS RANGE	F1.8 - 360 (DC auto-iris)	F 1.2 - 360 (DC auto-iris)	F 1.6 - 360 (DC auto-iris)
ANGLE OF VIEW	39.0° ~ 17.6° (D) 30.7° ~ 14.1° (H) 22.7° ~ 10.6° (V)	116.2° ~ 39.7° (D) 90.0° ~ 31.8° (H) 66.2° ~ 23.9° (V)	92.6° ~ 39.4° (D) 71.0° ~ 31.6° (H) 51.8° ~ 23.6° (V)
TV SYSTEM	NTSC	NTSC	EIA
SCANNING SYSTEM	2:1 Interlace	2:1 Interlace	2:1 Interlace
IMAGE SENSOR	1/3" IT CCD	1/3" IT CCD	1/3" IT CCD
EFFECTIVE PIXELS	768(H) x 492(V)	768(H) x 492(V)	510(H) x 492(V)
SCANNING FREQUENCY (Hz)	15.734 kHz / 59.94Hz	15.734 kHz / 59.94Hz	15.734 kHz / 59.94Hz
VIDEO OUTPUT	1.0 V (p/p) / 75 Ohms	1.0 V (p/p) / 75 Ohms	1.0 V (p/p) / 75 Ohms
RESOLUTION (HORIZONTAL)	480 TVL	480 TVL	380 TVL
MINIMUM ILLUMINANCE	2.3 lux @ F1.8 / 50 IRE 1.2 lux @ F1.8 / 30 IRE	1.0 lux @ F1.2/50IRE 0.5 lux @ F1.2/30IRE	0.3 lux @ F1.6/50IRE 0.15 lux @ F1.6/30IRE
AGC	22dB max.	22dB max.	22dB max.
S/N RATIO (AGC : OFF)	More than 48 dB	More than 48 dB	More than 50 dB
GAMMA CHARACTERISTICS	0.45	0.45	0.45
SYNC. SYSTEM	Internal / Line lock	Internal / Line lock	Internal / Line lock
WHITE BALANCE	Auto Tracking	Auto Tracking	-
POWER SUPPLY	AC 24V ± 10%, 60 Hz ± 1 Hz / DC 12V ± 10%		
POWER CONSUMPTION	3.1 W (12VDC) 3.4 W, 290mA (24VAC)	3.1 W (12VDC) 3.4 W, 290mA (24VAC)	1.9 W (12VDC) 2.2 W, 215mA (24VAC)
ADJUSTMENTS	DC iris level, Line phase	DC iris level, Line phase	DC iris level, Line phase
TEMPERATURE RANGE	Operation: 20°F~+113°F / Storage: -10°F~+140°F		
HUMIDITY RANGE	Operation: 80% RH max. / Storage: 85% RH max.		
EXTERNAL DIMENSIONS	128mm (Diameter) x 103mm (H) 5.04" (Diameter) x 4.06" (H)		
WEIGHT	400g / 0.88 lbs	400g / 0.88 lbs	400g / 0.88 lbs