



Monitors

26" Public View Monitors

BVM-26 Series

Features:


- Built-in PIXIM WDR 690 HTVL-E camera with 2.8-12mm lens
- LED backlight reduces power consumption 40%
- Video motion detection enabled
- Integrated SD card reader
- 3D noise reduction & comb filter
- Easy access to built-in camera
- 4:3 aspect ratio
- 24VDC (19"+) Operation






BVM-26 Series

26" Public View Monitors

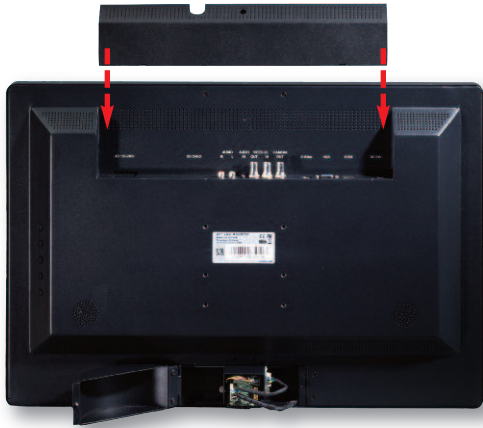

Input Panel (Cover Removed)

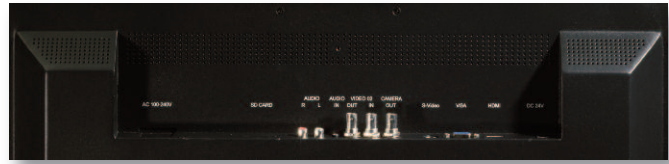

Input Panel (Cover Removed)



Camera Compartment (Door Open)

■ Specifications

Models:	BVM-26W-B (Black)	BVM-26W-W (White)
Screen Size	26" LED	
Resolution	1366 x 768	
Brightness	450 cd / m ²	
Contrast	1000:1	
Aspect Ratio	16:9	
Viewing Angle (H/V)	176° / 176°	
Response Time	5ms	
Video System	NTSC / PAL auto detection & OSD control	
Inputs	1 BNC, VGA, HDMI, S-Video, Audio (3.5mm), SD Card	
Outputs	2 BNC (loop out, camera out), Audio (RCA R/L)	
3D Noise Reduction	Yes	
3D Comb Filter	Yes	
Onboard Speakers	2 x 10W	
PIP / POP Option	Included	
Mounting	VESA 100 x 100mm	
Power / Consumption	24VDC / <100W	
Weight	16.6lbs (7.6kg)	
Dimensions	16.5" H x 24.5" W x 2.3" D (419mm H x 621mm W x 59.2mm D)	

Camera:	PIXIM WDR
Sensor	1/3" DPS Sensor
Focal Length	2.8-12mm
Resolution	690 HTVL-E
Minimum Illumination	0.1 lux
S/N Ratio	>50 dB (AGC Off)
WDR Control	Normal, Low, Medium, High
BLC	On / Off
AGC	Normal, Low, High
White Balance	AWB (2200-10000K)
SYNC Mode	Internal

All specifications are subject to change without notice

